

OS-FD REMOTE COMPRESSOR GLASS DOORS DISPLAY FREEZER

DESCRIPTION OF STANDARD UNIT:

- 2 depth: 32" & 36"
- LED lighting
- Construction of powder steel
- Sides of powder-coated steel
- Grey bumper
- 5 rows of adjustable, perforated shelves
- Low temperature e-doors, hinged
- Vertical lighting
- Price strips
- Forced cooling
- Temp. range* : -18 ÷ -22 °C
- External condensing unit**
- Expansion valve
- Without automatic water evaporation - designed for sewage system
- Digital temperature control




OPTIONS:

- Refrigerated version
- Multiplexing
- Condensate pump
- Electromag net /Solenoid valve

SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
OS1-FD	36"	32" / 36"	79 1/2"	330 / 150	220V / 60 Hz / 1ph 9 AMP
OS2-FD	68 3/8"		79 1/2"	661 / 300	220V / 60 Hz / 1ph 14 AMP
OS3-FD	98 5/8"		79 1/2"	1080 / 490	220V / 60 Hz / 1ph 20 AMP

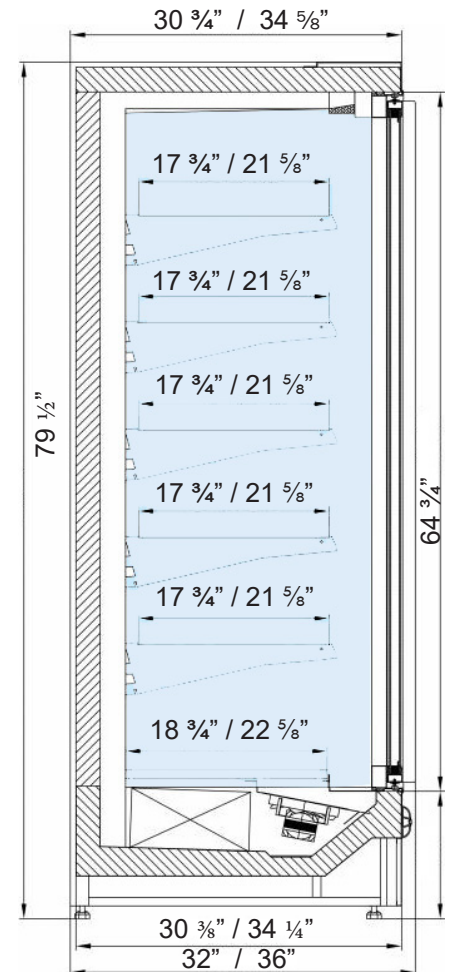

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.
 ** Cooling power demand: 1500 W/1m³ at evaporating temp. -10°C. Automatic water evaporation on request.
 *** In version with doors: only top lighting

Available Colors

