

VLV-DP

NON-REFRIGERATED SQUARE FRONT GLASS DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:


- Non refrigerated display
- 2 versions: Dry (VLV-DP) Refrigerated (VLV-RP).
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Front and Side with glasses
- Finishes: Silver
- Yellow lighting
- Sliding plexi rear doors
- Temp. range* : room temperature
- Temp. range for VLV-RP: 0 ÷ +4°C

OPTIONS:

- Version for chocolate & pralines
- Refrigerated version
- For external condensing unit
- Wheels
- Ultrasonic humidifier
- For individual decoration
- Multiplexing
- Flap doors on the front
- Highlighted front



* - Values are provided for an ambient temp of +25°C and relative humidity of 60%.
 ** - Cooling power demand: 1000 W/1mr at evaporating temp. -10°C.

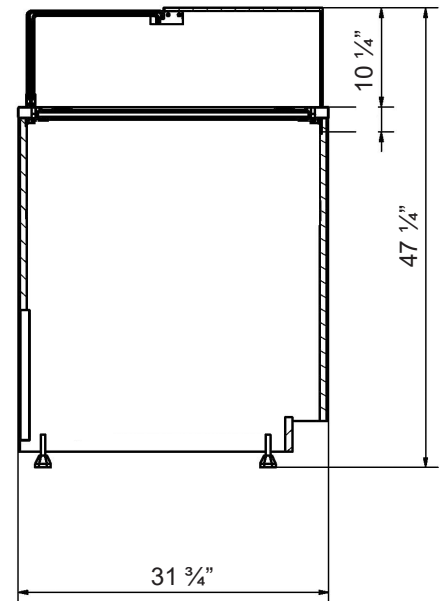

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
VLV4-DP	52 7/8"	31 3/4"	47 1/4"	339 / 154	115V / 60Hz / 1ph / 2 AMP
VLV6-DP	76 1/2"	31 3/4"	47 1/4"	509 / 231	115V / 60Hz / 1ph / 3 AMP
VLV8-DP	98 1/2"	31 3/4"	47 1/4"	677 / 307	115V / 60Hz / 1ph / 4 AMP



Profile Colors



RAL 9006
White
Aluminium

Available Colors



Wood Stains

