

PC-ROM

REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:


- Construction of powder-coated steel
- LED lighting
- ABS sides with glass
- Grey bumper
- 3 rows of adjustable shelves, highlighted
- Top lighting
- White lighting
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation
- Digital temperature control

OPTIONS:

- Multiplexing
- Version for external condensing unit
- Stainless steel shelves & base decks
- Light plafond
- Night blind
- Wheels



SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
PC2-ROM	23 5/8"	28 1/8"	55 1/8"	198 / 90	115V / 60Hz / 1ph / 8 AMP
PC3-ROM	35 1/2"		55 1/8"	253 / 115	115V / 60Hz / 1ph / 9.5 AMP
PC4-ROM	47 1/4"		55 1/8"	330 / 150	115V / 60Hz / 1ph / 11.5 AMP

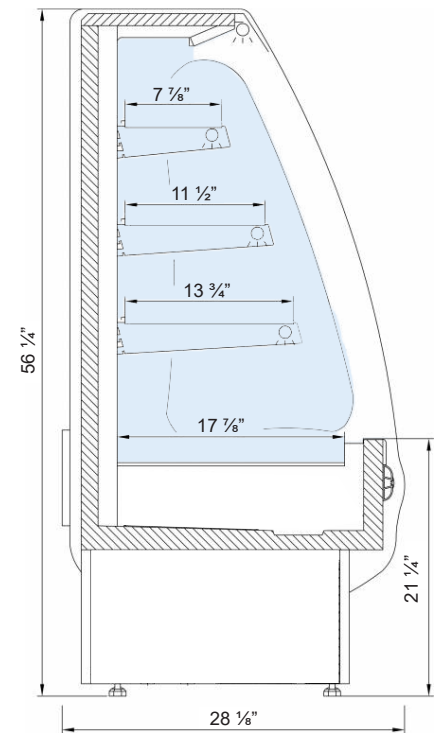

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.

** Cooling power demand: 1500 W/1m³ at evaporating temp. -10°C. Automatic water evaporation on request.

*** In version with doors: only top lighting

Available Colors

