

VR-ROM

REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- LED lighting
- Construction of powder-coated steel
- Sides of powder-coated steel: solid or glazed
- 5 rows of adjustable shelves
- White lighting
- Night blind
- EPOS ticket strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation
- Digital temperature control



OPTIONS:


- Multiplexing
- For external condensing unit
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas separator
- Shelf separators (wired)
- Profile with hooks
- Wood casing
- Wheels
- Heater under evaporator
- Sliding glass doors (in standard white frame, for request - black one)
- Hinged Plexiglas doors



Available with doors

SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL	ELECTRICAL WITH DOORS
VR2-ROM	23 5/8"	30 3/4"	82"	265 / 120	115V / 60Hz / 1ph 11.5 AMP	115V / 60Hz / 1ph 11.5 AMP
VR3-ROM	35 1/2"			419 / 190	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VR4-ROM	51 1/8"			485 / 220	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VR5-ROM	63"			551 / 250	115V / 60Hz / 1ph 15 AMP	115V / 60Hz / 1ph 15 AMP
VR6-ROM	74 3/4"			595 / 270	220V / 60Hz / 1ph 13.5 AMP	220V / 60Hz / 1ph 8 AMP
VR7-ROM	82 5/8"			639 / 290	220V / 60Hz / 1ph 13.5 AMP	220V / 60Hz / 1ph 8 AMP
VR8-ROM	98 1/2"			706 / 320	220V / 60Hz / 1ph 13.5 AMP	220V / 60Hz / 1ph 9 AMP

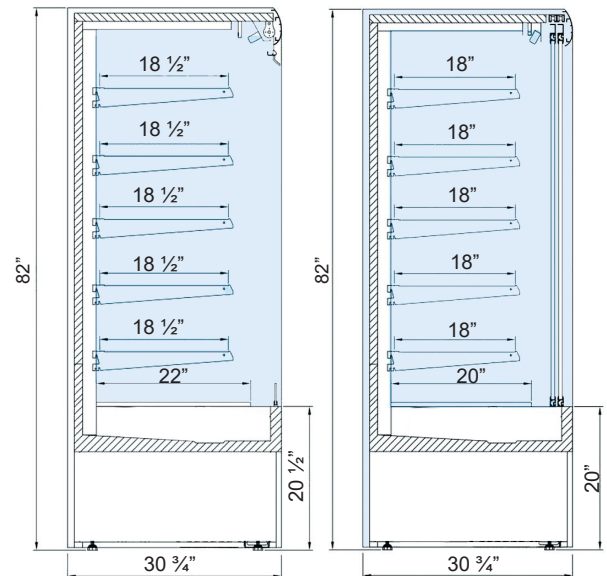

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.

** Cooling power demand: 1500 W/1mr at evaporating temp. -10°C. Automatic water evaporation on request.

*** In version with doors: only top lighting



Available Colors

