

## AT-ROM

### MULTI-DECK REFRIGERATED ISLAND MERCHANDISER

#### DESCRIPTION OF STANDARD UNIT:

- LED lighting
- Construction & casing of powder-coated steel
- Glazed sides with grey serigraphy with PCV finishing
- 3 rows of adjustable shelves
- Highlighted shelves
- Top lighting
- White, LED lighting
- EPOS ticket strips
- Forced cooling
- Temp. range\* : 0 ÷ +4 °C
- Automatic water evaporation
- Digital temperature control
- Access to condenser from the front
- Neutral corner with 3 rows of shelves
- Night blind





#### OPTIONS:

- External condensing unit (AZ)\*\*
- Multiplexing (creating islands)
- Stoppers: wired or Plexiglas

#### SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
AT2-ROM	23 5/8"	26"	54 1/2"	243 / 110	115V / 60Hz / 1ph 9.5 AMP
AT3-ROM	35 3/8"		54 1/2"	353 / 160	115V / 60Hz / 1ph 11.5 AMP
AT-CDOM	16 7/8" 29 7/8"		54 1/2"	66 / 30	Corner / Dry Unit
AT-ISLAND	95 1/4"		57 5/8"	1455 / 660	According to Sizes

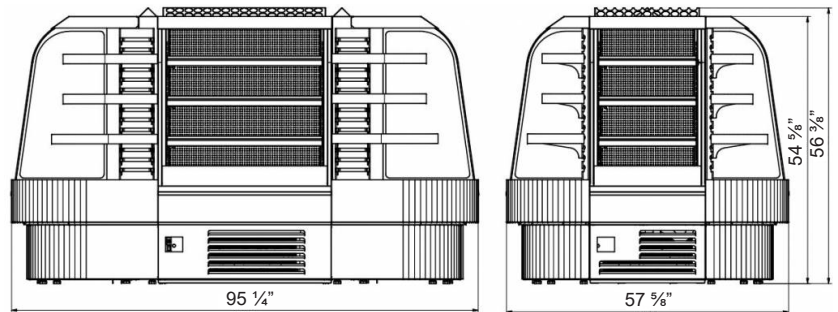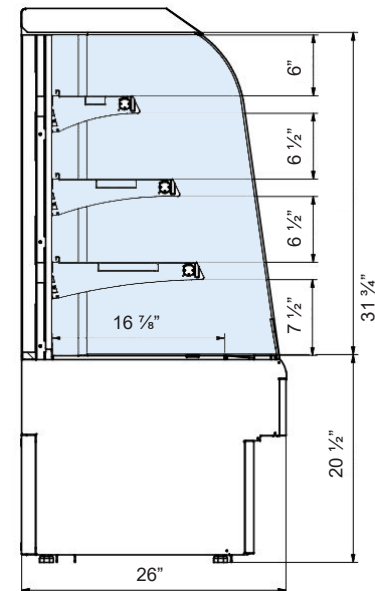

\* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.  
 \*\* Cooling power demand: 1600 W/1mr at evaporating temp. -10°C. Automatic water evaporation on request.  
 \* Values are provided for an evaporation temp. of -10 °C, condensation temp. of +45 °C, ambient temp of +25 °C and relative humidity of 60%.

#### Available Colors

