

CMC90-IWRP

CURVED FRONT GLASS

REFRIGERATED CORNER DISPLAY

DESCRIPTION OF STANDARD UNIT:

- 3 versions: Refrigerated (CM-R), Hot (CM-H), Dry (CM-D)
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Side and front glasses: double with serigraphy (golden, silver or black)
- Finishes: golden, silver or black
- Yellow lighting
- Sliding, double glass rear doors
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front glass secured by string cable
- Front opening glass
- Digital temperature control

OPTIONS:

- Version for chocolate & pralines
- Dry case (room temperature)
- Heated case
- For external condensing unit
- Wheels
- Ultrasonic humidifier
- Stainless steel worktop
- Thermometer in the lamp
- For individual decoration
- Multiplexing
- Flap doors on the front
- Highlighted front


* - Values are provided for an ambient temp of +25°C and relative humidity of 60%.

** - Cooling power demand: 1000 W/1mr at evaporating temp. -10°C.


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
CMC90-IWRP	52 1/2"	33 1/2"	54"	617 / 280	115V / 60Hz / 1ph 11.5 AMP



Profile Colors



Available Colors

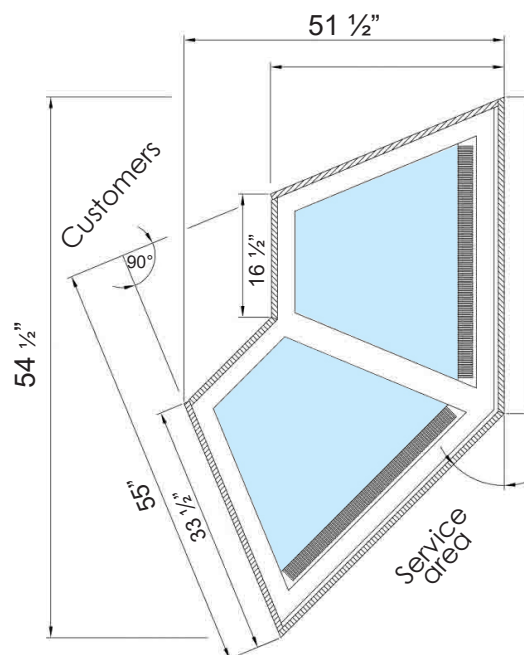

Wood Stains

