

HWL-RD

LOW GLASS / GRAB & GO - REFRIGERATED CASE
DELI / MEAT / CHEESE / SALAD & SANDWICH CASE

DESCRIPTION OF STANDARD UNIT:


- Gravity cooling
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Stainless steel storage chamber (except corners)
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Automatic water Evaporation
- Temp. range* for version with gravity cooling (G): 0 ÷ +4 °C
- Digital temperature control



OPTIONS:

- For external condensing unit
- Serve-over version, temp. range*: 0 ÷ +4 °C
- Forced cooling version, temp. range (F): 0 ÷ +4 °C
- White lighting
- Multiplexing
- Granite worktop
- Wheels
- Cash registers cabinet

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
HWL3-RD	42 1/2"	45 1/8"	35 1/2"	284 / 128	115V / 60Hz / 1ph / 6 AMP
HWL4-RD	52 1/4"	45 1/8"	35 1/2"	345 / 156	115V / 60Hz / 1ph / 6 AMP
HWL5-RD	62 1/8"	45 1/8"	35 1/2"	390 / 177	115V / 60Hz / 1ph / 8 AMP
HWL6-RD	81 3/4"	45 1/8"	35 1/2"	465 / 211	115V / 60Hz / 1ph / 8 AMP
HWL8-RD	101 1/2"	45 1/8"	35 1/2"	645 / 293	115V / 60Hz / 1ph / 8 AMP
HWL10-RD	121 1/4"	45 1/8"	35 1/2"	811 / 368	115V / 60Hz / 1ph / 10.5 AMP
HWL12-RD	150 5/8"	45 1/8"	35 1/2"	990 / 449	115V / 60Hz / 1ph / 11 AMP

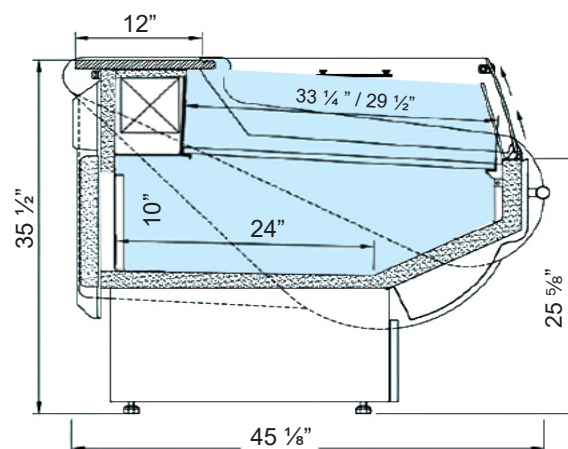


* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.


** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).



Wood Stains



Granite Finishes



Available Colors



154 Norfinch Dr, Unit 5 - 6, North York, Ont, M3N 1X6 | TEL: 416-665-0095 | TOLL FREE: 877-265-0095

info@frosttechrefrigeration.com | www.frosttechrefrigeration.com

