

MDS-RD

STRAIGHT FRONT GLASS CHEESE / DELI / MEAT / FISH / SALAD / SANDWICH CASE

DESCRIPTION OF STANDARD UNIT:

- 2 versions: with gravity (G) or forced (F) cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Stainless steel worktop
- Stainless steel storage chamber
- Heater under evaporator (except corners)
- Heated Aluminum glass profile
- Temp. range* for version with forced cooling (F): $0 \div +4^{\circ}\text{C}$
- Temp. range* for version with gravity cooling (G): $0 \div +4^{\circ}\text{C}$
- Automatic water evaporation
- Front opening glass
- Digital temperature control

OPTIONS:


- For external condensing unit
- Hot version (HW-H) - temp. range*: $+40 \div +90^{\circ}\text{C}$
- Self-service version, temp. range*: $0 \div +4^{\circ}\text{C}$
- Fish version, temp. range (F): $0 \div +4^{\circ}\text{C}$
- White lighting
- Multiplexing
- Cash registers cabinet
- Granite worktop
- Wheels
- Dry version

* Temperature range given for max ambient temp of $+25^{\circ}\text{C}$ and relative humidity of 60%.

** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).




Available with Lift Up system of front glass

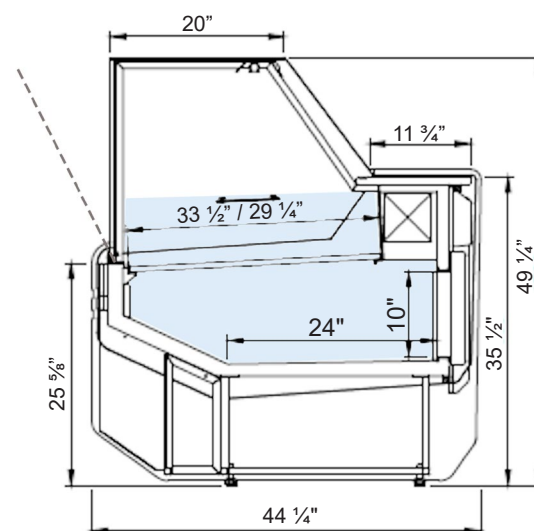


SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDS3-RD	42 1/2"	44 1/4"	49 1/4"	319 / 145	115V / 60Hz / 1ph / 6 AMP
MDS4-RD	52 1/4"	44 1/4"	49 1/4"	429 / 195	115V / 60Hz / 1ph / 6 AMP
MDS5-RD	62 1/8"	44 1/4"	49 1/4"	553 / 251	115V / 60Hz / 1ph / 8 AMP
MDS6-RD	81 3/8"	44 1/4"	49 1/4"	703 / 319	115V / 60Hz / 1ph / 8 AMP
MDS8-RD	101 1/2"	44 1/4"	49 1/4"	835 / 379	115V / 60Hz / 1ph / 8 AMP
MDS10-RD	121 1/4"	44 1/4"	49 1/4"	923 / 419	115V / 60Hz / 1ph / 10.5 AMP
MDS12-RD	150 5/8"	44 1/4"	49 1/4"	1122 / 509	115V / 60Hz / 1ph / 11 AMP



Wood Stains



Granite Finishes



Available Colors



154 Norfinch Dr, Unit 5 - 6, North York, Ont, M3N 1X6 | TEL: 416-665-0095 | TOLL FREE: 877-265-0095

info@frosttechrefrigeration.com | www.frosttechrefrigeration.com

