



MDSC-RD

SQUARE GLASS CORNER REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Forced cooling
- LED Market lighting
- Construction of powder-coated steel
- ABS sides
- Front made of powder-coated steel
- Chrome bumper
- Stainless steel worktop
- Heated Aluminum glass profile
- Temp. range* : 0 ÷ +4 °C
- Front opening glass
- Automatic water Evaporation
- Digital temperature control





OPTIONS:

- For external condensing unit
- Fish version (FISH)
- Self-service version, forced cooling temp. range*: 0 ÷ +4 °C
- Two levels exposition trays
- Wheels
- Multiplexing
- Stand for scales, cash registers
- Granite worktop

* Temperature range given for max ambient temp of +25°C and relative humidity of 60%.

** Cooling power demand: 400 W/1mr at evaporating temp. -10°C (F); 350W/1mr at evaporating temp. -25°C (G).

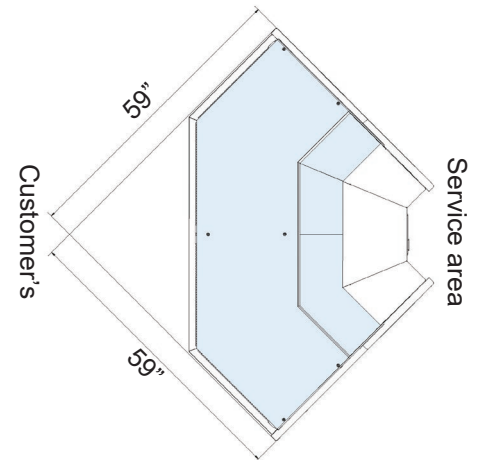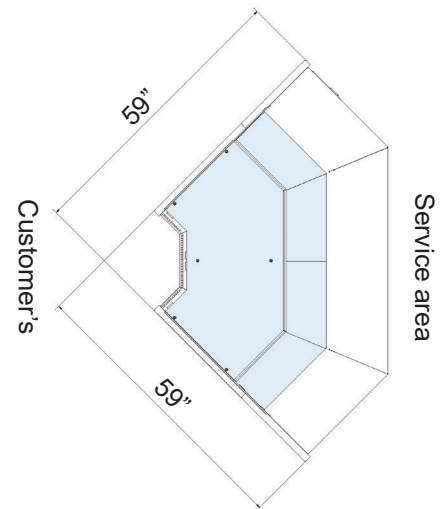


SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
MDSC90-IRD	59"	45 1/8"	49 1/4"	330 / 150	115V / 60Hz / 1ph 8 AMP
MDSC90-ORD	59"	45 1/8"	49 1/4"	330 / 150	115V / 60Hz / 1ph 8 AMP



Granite Finishes



Available Colors

