

VN-DP

NON-REFRIGERATED CURVED GLASS DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- Construction and casing of stainless steel
- LED lighting
- Side glasses: double with silver serigraphy
- Front glass in closed version: double with silver serigraphy
- 3 rows of highlighted, adjustable shelves: glass
- (VN-R, VN-D) or stainless steel (VN-H)
- Yellow lighting
- Perforated, stainless steel back panel in self-service (O) version
- Sliding, double glass rear doors (except VN 60 - hinged glass doors)
- Temp. range* room temperature
- Front opening glass




OPTIONS:

- Refrigerated version
- For external condensing unit
- Wheels
- Ultrasonic humidifier (except VN 2)
- Front glass secured by the chain
- MDF front panel and sides
- Rear, hinged Plexiglas doors for self-service version

* - Values are provided for an ambient temp of +25°C and relative humidity of 60%.
 ** - Cooling power demand: 1000 W/1mr at evaporating temp. -10°C.


SPECIFICATIONS – Closed Front					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
VN2-DP	24"	31 1/2"	53 1/2"	309 / 140	115V / 60Hz / 1ph / 2 AMP
VN3-DP	35 1/2"	31 1/2"	53 1/2"	375 / 170	115V / 60Hz / 1ph / 2 AMP
VN4-DP	47"	31 1/2"	53 1/2"	463 / 210	115V / 60Hz / 1ph / 3 AMP

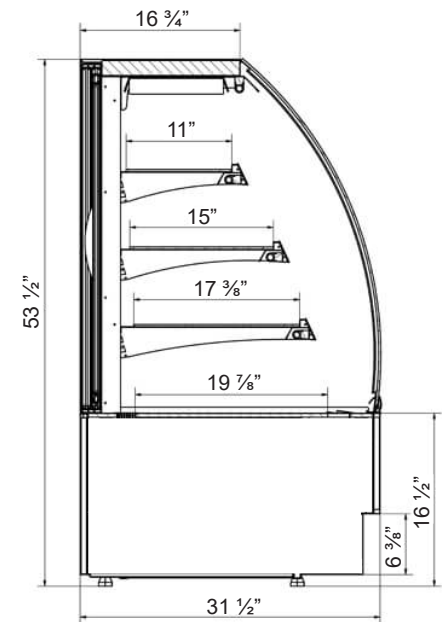

Profile Colors



Wood Stains



Available Colors

