

YK-ROM


REFRIGERATED OPEN MERCHANDISER REMOTE COMPRESSOR

DESCRIPTION OF STANDARD UNIT:

- 4 depths: 26 ¾" - 30 ½" - 34 ½" - 42 ¼"
- 2 heights: 78" & 88"
- LED lighting
- Internal corner
- Construction of powder-coated steel
- Sides of powder-coated steel or with glass
- Grey bumper
- 5 (YK) or 6 (YKT) rows of adjustable shelves
- Top lighting
- White lighting
- Night blind
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4 °C
- Automatic defrosting
- Without automatic water Evaporation (designed for sewage system)
- For external condensing unit**
- Expansion valve

OPTIONS:

- Multiplexing
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas or stainless separator
- Shelf separators (wired)
- Available with side glass
- Available with doors
- Profile with hooks
- Heater under evaporator
- Condensate pump
- Electromagnet /Solenoid valve
- Sliding glass doors (in standard white frame for request - black one)
- Hinged Plexiglas doors
- Electrical night blind



Available Colors


																			
RAL 1015 Beige	RAL 1023 Traffic Yellow	RAL 3020 Traffic Red	RAL 5015 Sky Blue	RAL 6032 Signal Green	RAL 9016 Traffic White	RAL 9005 Jet Black	RAL 9006 White Aluminium	RAL 1018 Zinc Yellow	RAL 1036 Pearl Gold	RAL 2004 Pure Orange	RAL 3004 Purple Red	RAL 4010 Telemagenta	RAL 5002 Ultramarine Blue	RAL 6018 Yellow Green	RAL 7016 Anthracite Grey	RAL 7022 Umbra Grey	RAL 7035 Light Grey	RAL 8016 Mahogany Brown	RAL 9010 Pure White Structural

SPECIFICATIONS – YK-ROM 78" Height					
MODEL	L	D	H	WEIGHT (LBS / KG)	ELECTRICAL
YK4-ROM	49 1/4"	26 3/4" / 30 1/2" / 34 1/2" / 42 1/4"	80 1/4"	419/485/507/529 190/220/230/240	208V / 60Hz / 1ph 4 AMP
YK5-ROM	59"			529/572/595/617 240/320/340/360	208V / 60Hz / 1ph 4 AMP
YK6-ROM	73 3/4"			617/705/750/794 280/320/340/360	208V / 60Hz / 1ph 5 AMP
YK7-ROM	78 3/4"			705/750/772/838 320/340/350/380	208V / 60Hz / 1ph 5 AMP
YK8-ROM	98 1/2"			794/816/838/860 360/370/380/390	208V / 60Hz / 1ph 6 AMP
YK10-ROM	118 1/8"			948/992/1036/1102 430/450/470/500	208V / 60Hz / 1ph 8 AMP
YK12-ROM	147 1/8"			1168/1235/1279/12390 530/560/580/620	208V / 60Hz / 1ph 9 AMP


SPECIFICATIONS – YK-TROM 88" Height					
MODEL	L	D	H	WEIGHT (LBS / KG)	ELECTRICAL
YKT4-ROM	49 1/4"	26 3/4" / 30 1/2" / 34 1/2" / 42 1/4"	88 3/8"	463/530/551/573 210/240/250/260	208V / 60Hz / 1ph 4 AMP
YKT5-ROM	59"			573/617/639/683 260/280/290/310	208V / 60Hz / 1ph 4 AMP
YKT6-ROM	73 3/4"			683/772/816/860 310/350/370/390	208V / 60Hz / 1ph 5 AMP
YKT7-ROM	78 3/4"			772/816/838/904 350/370/380/410	208V / 60Hz / 1ph 5 AMP
YKT8-ROM	98 1/2"			860/882/904/926 390/400/410/420	208V / 60Hz / 1ph 6 AMP
YKT10-ROM	118 1/8"			1036/1080/1124/1190 470/490/510/540	208V / 60Hz / 1ph 8 AMP
YKT12-ROM	147 1/8"			1279/1345/1389/1477 580/610/630/670	208V / 60Hz / 1ph 9 AMP



WITH DOORS

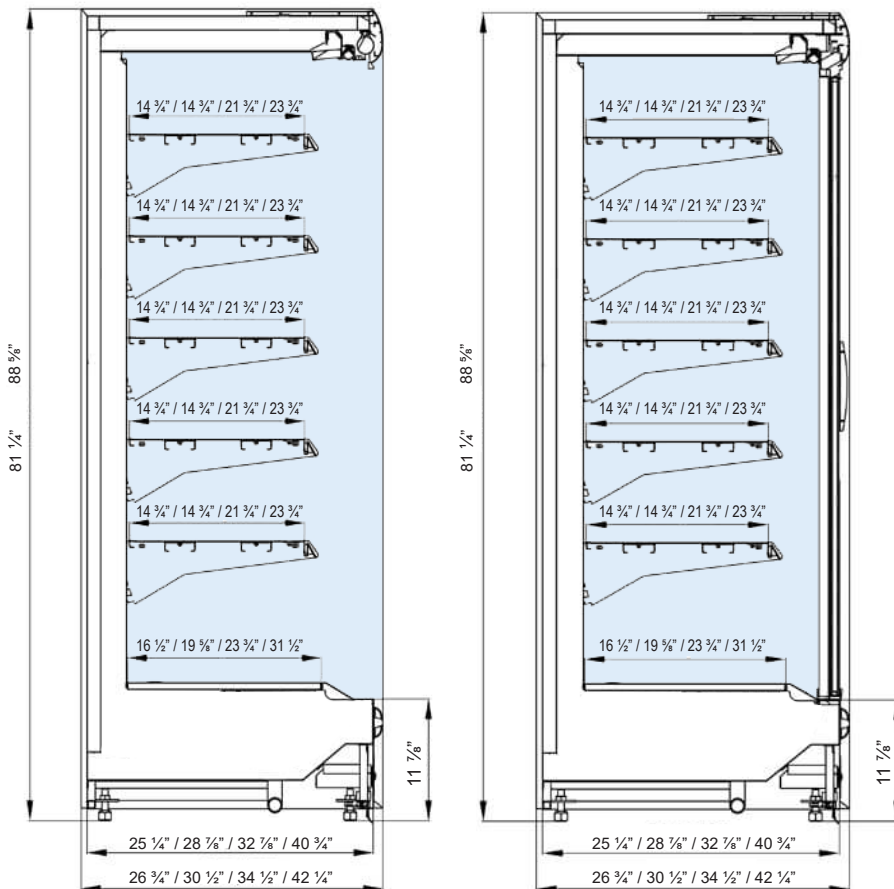

Corner Unit

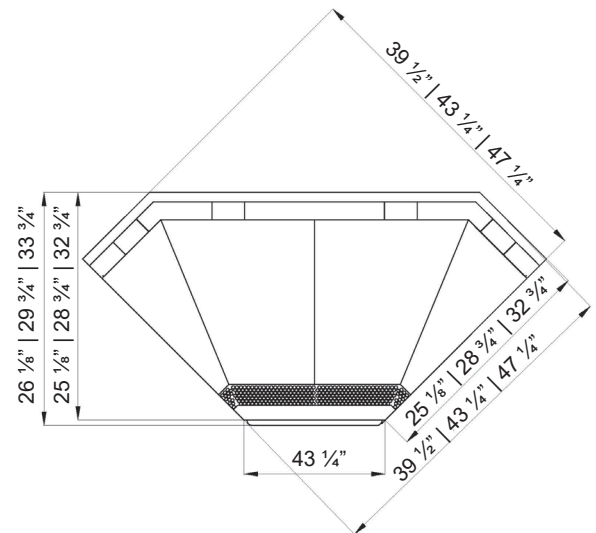

COOLING CAPACITY: 1800 BTU P\F @ 14 / 113 F

