

RF-2SWRP

LOW VERSION - 2 SHELVES

SQUARE FRONT GLASS REFRIGERATED DISPLAY CASE

DESCRIPTION OF STANDARD UNIT:

- 3 versions: Refrigerated (RF-R), Hot (RF-H) Dry (RF-D)
- LED lighting
- Construction of powder coated steel
- Wooden casing
- Side and front glasses: double with serigraph (silver or black)
- 2 rows of highlighted adjustable shelves: glass (RF-R, RF-D) or stainless steel (RF-H)
- Sliding, double glass rear doors (except RF2 - hinged glass doors)
- Forced cooling
- Temp. range* for RF-R: 0 ÷ +4°C
- Temp. range* for RF-H: +40 ÷ +90°C
- Dry non refrigerated RF-D: (room temperature).
- Automatic water Evaporation
- Hygrostat (humidity reduction)
- Front opening glass
- Front glass secured by string cable
- Digital temperature control




OPTIONS:

- Version for chocolate & pralines
- For external condensing unit
- Wheels
- Ultrasonic humidifier (except RF 2)
- Stainless steel worktop
- Thermometer in the lamp
- For individual decoration
- Multiplexing
- Highlighted front
- Glass on top worktop

* - Values are provided for an ambient temp of +25°C and relative humidity of 60%.

** - Cooling power demand: 1000 W/1mr at evaporating temp. -10°C.

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
RF2-2SWRP	25 1/4"	33 3/4"	46"	253 / 115	115V / 60Hz / 1ph / 8 AMP
RF3-2SWRP	37"	33 3/4"	46"	374 / 170	115V / 60Hz / 1ph / 9.5 AMP
RF4-2SWRP	51 1/4"	33 3/4"	46"	485 / 220	115V / 60Hz / 1ph / 11.5 AMP

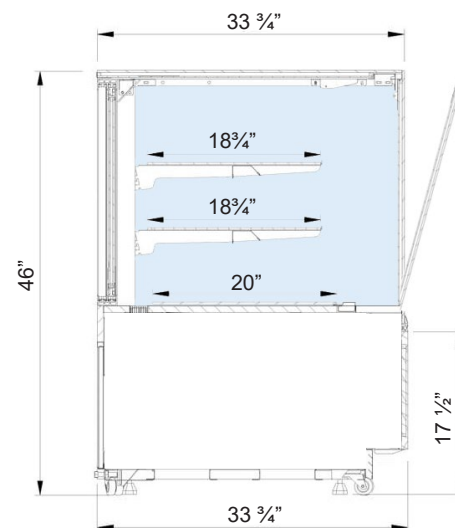


Profile Colors



Available Colors



Wood Stains



154 Norfinch Dr, Unit 5 - 6, North York, Ont, M3N 1X6 | TEL: 416-665-0095 | TOLL FREE: 877-265-0095

info@frosttechrefrigeration.com | www.frosttechrefrigeration.com

