

## PR-RDM

### DUAL SERVICE REFRIGERATED DISPLAY

#### DESCRIPTION OF STANDARD UNIT:

- Refrigerated version
- Refrigerant R290
- LED lighting (Warm white)
- Construction of powder coated steel
- Sliding Plexiglas doors for the upper section
- Double glazed side glass
- Stainless steel interior
- Forced cooling
- Temp. range\*: 0 ÷ +4°C
- Automatic water Evaporation
- Front glass secured by string cable
- Front opening glass
- Digital temperature control

#### OPTIONS:

- Heated version: Natural lower part and heated upper part
- Neutral version: Neutral lower part and upper part
- For external condensing unit
- Wheels

\* - Values are provided for an ambient temp of +25°C and relative humidity of 60%.  
 \*\* - Cooling power demand: 1000 W/1m<sup>2</sup> at evaporating temp. -10°C.




| SPECIFICATIONS |         |         |        |                   |                            |
|----------------|---------|---------|--------|-------------------|----------------------------|
| MODEL          | LENGTH  | DEPTH   | HEIGHT | WEIGHT (LBS / KG) | ELECTRICAL                 |
| PR3-RDM        | 39 1/2" | 40 1/2" | 53"    | 551 / 250         | 115V / 60Hz / 1ph / 12 AMP |



Refrigerated or Dry area


Refrigerated Open area

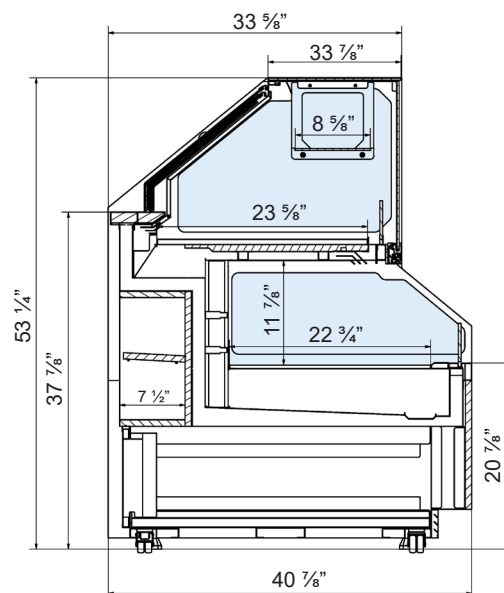

#### Profile Colors



#### Wood Stains



#### Available Colors



154 Norfinch Dr, Unit 5 - 6, North York, Ont, M3N 1X6 | TEL: 416-665-0095 | TOLL FREE: 877-265-0095

info@frosttechrefrigeration.com | www.frosttechrefrigeration.com

