

## VR-ROM

### REFRIGERATED OPEN MERCHANDISER

#### DESCRIPTION OF STANDARD UNIT:

- LED lighting
- Construction of powder-coated steel
- Sides of powder-coated steel: solid or glazed
- 5 rows of adjustable shelves
- White lighting
- Night blind
- EPOS ticket strips
- Forced cooling
- Temp. range\*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation
- Digital temperature control



Available with doors


#### OPTIONS:

- Multiplexing
- For external condensing unit
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas separator
- Shelf separators (wired)
- Profile with hooks
- Wood casing
- Wheels
- Heater under evaporator
- Sliding glass doors (in standard white frame, for request - black one)
- Hinged Plexiglas doors

#### SPECIFICATIONS

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL OPEN FRONT	ELECTRICAL WITH DOORS
VR2-ROM	23 5/8"	30 3/4"	82"	265 / 120	115V / 60Hz / 1ph 7 / 11 AMP	115V / 60Hz / 1ph 11.5 AMP
VR3-ROM	35 1/2"			419 / 190	115V / 60Hz / 1ph 8 / 12 AMP	115V / 60Hz / 1ph 15 AMP
VR4-ROM	50"			485 / 220	115V / 60Hz / 1ph 8.5 / 12.5 AMP	115V / 60Hz / 1ph 15 AMP
VR5-ROM	63"			551 / 250	220V / 60Hz / 1ph 8 / 16 AMP	220V / 60Hz / 1ph 7 / 14 AMP
VR6-ROM	73 3/4"			595 / 270	220V / 60Hz / 1ph 9.5 / 17 AMP	220V / 60Hz / 1ph 8 / 16 AMP
VR7-ROM	82 5/8"			639 / 290	220V / 60Hz / 1ph 9.5 / 17 AMP	220V / 60Hz / 1ph 8.5 / 17 AMP
VR8-ROM	97 1/4"			706 / 320	220V / 60Hz / 1ph 9.5 / 17 AMP	220V / 60Hz / 1ph 9 / 17 AMP

\* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.  
 \*\* Cooling power demand: 1500 W/1m<sup>2</sup> at evaporating temp. -10°C. Automatic water evaporation on request.  
 \*\*\* In version with doors: only top lighting  
 \*\*\*\* We reserve the right to modify or change the technical specifications of the product without prior notice.

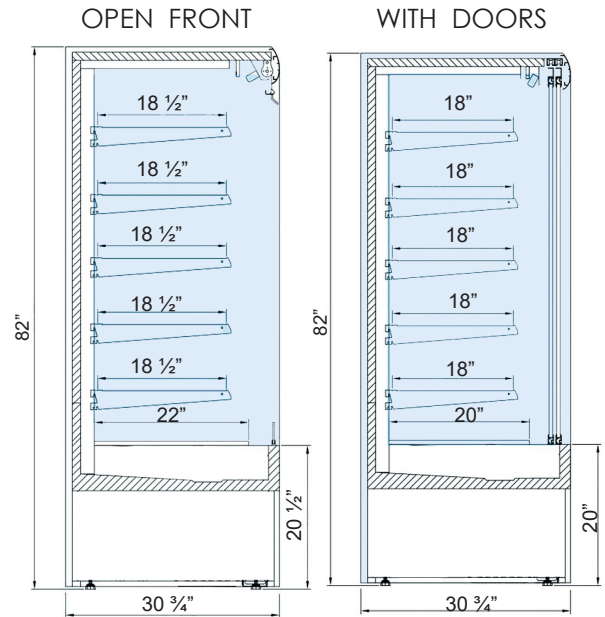

#### Available Colors

