



EL-SROM

Self-Contained

REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:


- Construction of powder-coated steel
- LED lighting
- Glass sides
- 3 rows of adjustable shelves
- Top lighting
- Night blind
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- For external condensing unit**
- Expansion valve
- Digital temperature control



OPTIONS:

- Multiplexing (also creating islands)
- For external condensing unit (Remote)
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas separator
- Shelf separators (wired)
- Condensate pump
- Electromagnet valve

MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
EL3-SROM	43 1/4"	29 1/4"	62 7/8"	441 / 200	115V / 60Hz / 1ph / 15 AMP
EL4-SROM	53 1/4"	29 1/4"	62 7/8"	588 / 266	115V / 60Hz / 1ph / 15 AMP
EL5-SROM	63"	29 1/4"	62 7/8"	735 / 333	220V / 60Hz / 1ph / 10 AMP
EL6-SROM	77 3/4"	29 1/4"	62 7/8"	881 / 399	220V / 60Hz / 1ph / 9 / 17 AMP
EL8-SROM	102 1/4"	29 1/4"	62 7/8"	1176 / 533	220V / 60Hz / 1ph / 9 / 17 AMP

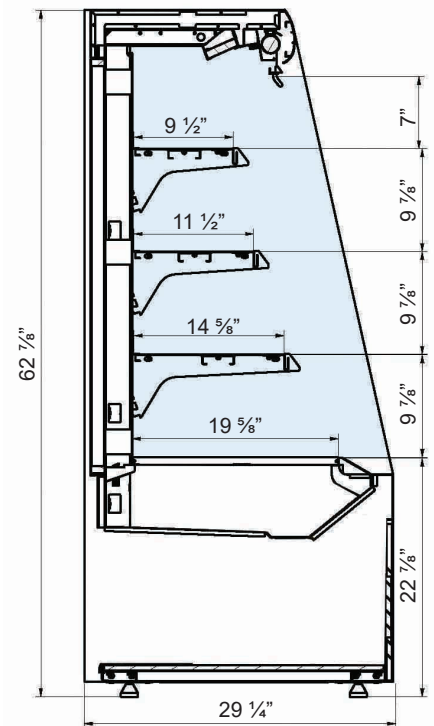

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.

** Cooling power demand: 1500 W/1mr at evaporating temp. -10°C. Automatic water evaporation on request.

*** In version with doors: only top lighting

**** All measurements are approximates

***** We reserve the right to modify or change the technical specifications of the product without prior notice.

Available Colors



154 Norfinch Dr, Unit 5 - 6, North York, Ont, M3N 1X6 | TEL: 416-665-0095 | TOLL FREE: 877-265-0095

info@frosttechrefrigeration.com | www.frosttechrefrigeration.com

