

KB-ROM

Self-Contained

REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:


- Construction of powder-coated steel
- LED lighting
- Glass sides
- 2 rows of adjustable shelves
- Highlighted shelves
- Night blind
- Price strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Expansion valve
- Digital temperature control

OPTIONS:

- Multiplexing.
- For external condensing unit (Remote)
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas separator
- Shelf separators (wired)
- Condensate pump
- Electromagnet valve



MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL
KB4-ROM	51 1/2"	34 1/4"	46 1/4"	440 / 200	115V / 60Hz / 1ph / 12 AMP
KB6-ROM	76 1/8"	34 1/4"	46 1/4"	683 / 310	220V / 60Hz / 1ph / 13.5 AMP
KB7-ROM	81 1/8"	34 1/4"	46 1/4"	771 / 350	220V / 60Hz / 1ph / 13 / 17.5 AMP
KB8-ROM	98 1/2"	34 1/4"	46 1/4"	925 / 420	220V / 60Hz / 1ph / 14.5 / 18.5 AMP
KB10-ROM	120 1/2"	34 1/4"	46 1/4"	1058 / 480	220V / 60Hz / 1ph / 15.5 / 20 AMP

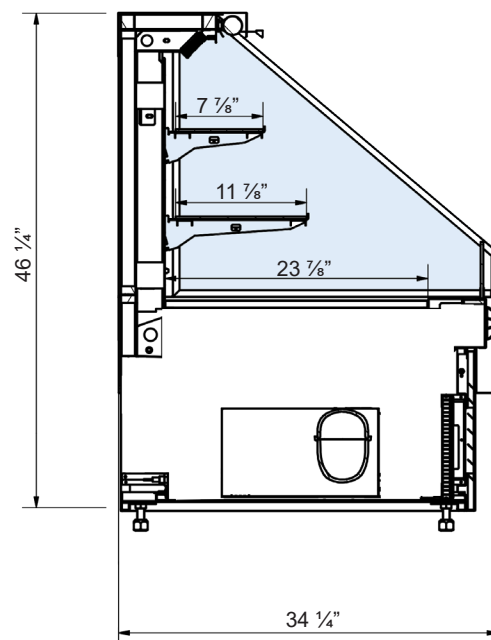

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.

** Cooling power demand: 1500 W/1m² at evaporating temp. -10°C. Automatic water evaporation on request.

*** In version with doors: only top lighting

**** All measurements are approximates.

***** Specification is subject to change without notice

Available Colors



154 Norfinch Dr, Unit 5 - 6, North York, Ont, M3N 1X6 | TEL: 416-665-0095 | TOLL FREE: 877-265-0095

info@frosttechrefrigeration.com | www.frosttechrefrigeration.com

