

VR-ROM

REFRIGERATED OPEN MERCHANDISER

DESCRIPTION OF STANDARD UNIT:

- LED lighting
- Construction of powder-coated steel
- Sides of powder-coated steel: solid or glazed
- 5 rows of adjustable shelves
- White lighting
- Night blind
- EPOS ticket strips
- Forced cooling
- Temp. range*: 0 ÷ +4°C
- Automatic defrosting
- Automatic water evaporation
- Digital temperature control



Available with doors


OPTIONS:

- Multiplexing
- For external condensing unit
- Highlighted shelves
- Stainless steel shelves & base decks
- Back panel from mirrored stainless steel
- Angled mirrored stainless steel roof
- Stoppers: wired or from Plexiglas
- Vertical Plexiglas separator
- Shelf separators (wired)
- Profile with hooks
- Wood casing
- Wheels
- Heater under evaporator
- Sliding glass doors (in standard white frame, for request - black one)
- Hinged Plexiglas doors

OPEN FRONT

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL OPEN FRONT
VR2-ROM	23 5/8"	30 3/4"	82"	265 / 120	115V / 60Hz / 1ph 7 / 11 AMP
VR3-ROM	35 1/2"			419 / 190	115V / 60Hz / 1ph 8 / 12 AMP
VR4-ROM	50"			485 / 220	115V / 60Hz / 1ph 8.5 / 12.5 AMP
VR5-ROM	63"			551 / 250	220V / 60Hz / 1ph 10 AMP
VR6-ROM	73 3/4"			595 / 270	220V / 60Hz / 1ph 9 / 17 AMP
VR7-ROM	82 5/8"			639 / 290	220V / 60Hz / 1ph 9 / 17 AMP
VR8-ROM	97 1/4"			706 / 320	220V / 60Hz / 1ph 9 / 17 AMP

OPEN FRONT

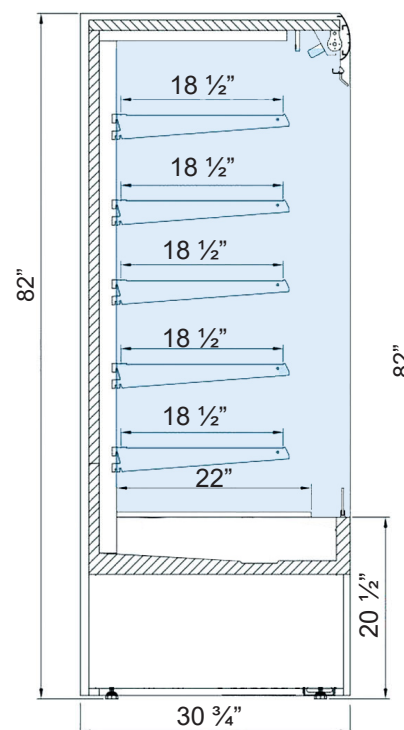


WITH DOORS

SPECIFICATIONS					
MODEL	LENGTH	DEPTH	HEIGHT	WEIGHT (LBS / KG)	ELECTRICAL WITH DOORS
VR2-ROM	23 5/8"	30 3/4"	82"	286 / 130	115V / 60Hz / 1ph 6 / 9 AMP
VR3-ROM	35 1/2"			463 / 210	115V / 60Hz / 1ph 7 / 11 AMP
VR4-ROM	50"			529 / 240	115V / 60Hz / 1ph 7 / 11 AMP
VR5-ROM	63"			595 / 260	220V / 60Hz / 1ph 8 AMP
VR6-ROM	73 3/4"			697 / 316	220V / 60Hz / 1ph 8 / 16 AMP
VR7-ROM	82 5/8"			760 / 345	220V / 60Hz / 1ph 8.5 / 17 AMP
VR8-ROM	97 1/4"			837 / 380	220V / 60Hz / 1ph 9 / 17 AMP



WITH DOORS

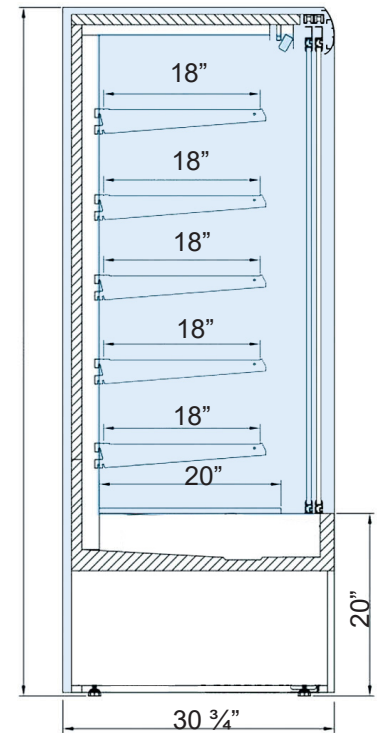

* Temperature range given for maximum ambient temperature of +25°C and relative humidity 60%.
 ** Cooling power demand: 1500 W/1m² at evaporating temp. -10°C. Automatic water evaporation on request.
 *** In version with doors: only top lighting
 *** We reserve the right to modify or change the technical specifications of the product without prior notice.



Available Colors



154 Norfinch Dr, Unit 5 - 6, North York, Ont, M3N 1X6 | TEL: 416-665-0095 | TOLL FREE: 877-265-0095

info@frosttechrefrigeration.com | www.frosttechrefrigeration.com

